
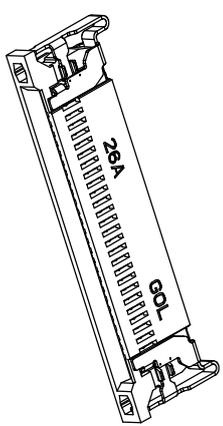


RECOMMEND PCB LAYOUT
DEFAULT TOL:±0.05



3D VIEW


NOTES:
 Insulator: LCP , UL 94V-0
 Shell: STAINLESS STEEL/Au-Plated
 Terminal: PHOSPHOR COPPER/Au-Plated
 Current Rating: 0.5A AC,DC
 Voltage Rating: 200V AC,DC
 Temperature range: -40°C~+85°C
 Contact resistance: 60mΩ Max
 Insulation resistance: 100MΩ Min
 Withstand voltage: 250V,AC/minute


1 F 05067 F 26 C 1 3 - HF

FPC Type
 Serial number
 F: Gold flash
 T: Matte Tin flash
 PIN NO.

HF: No Hologen
 3: Without mylar & Reel packing
 0: Natural
 1: BLACK

GENERAL TOLERANCE		DRAWN	Wilson Sun	02/23/21	SCALE	PART NO.	1F05067F26C13-HF
X.±0.30	X.±3.0°	CHECKED	SHENJIE CHU	02/23/21	1/1	TITLE	0.5 Pitch H=1.5 Auto-lock FPC
.X±0.25	.X±2.0°	APPROVED	CUNFA LAI	02/23/21	UNITS	mm	CUSTOMER DRAWING
.XX±0.20		File NO.	F0506701S				
.XXX±0.10		REV.					
SHEET	1/3	QTY	1	A	蘇州祥龍嘉業電子科技股份有限公司 Goldenconn Electronic Technology Co.,LTD		

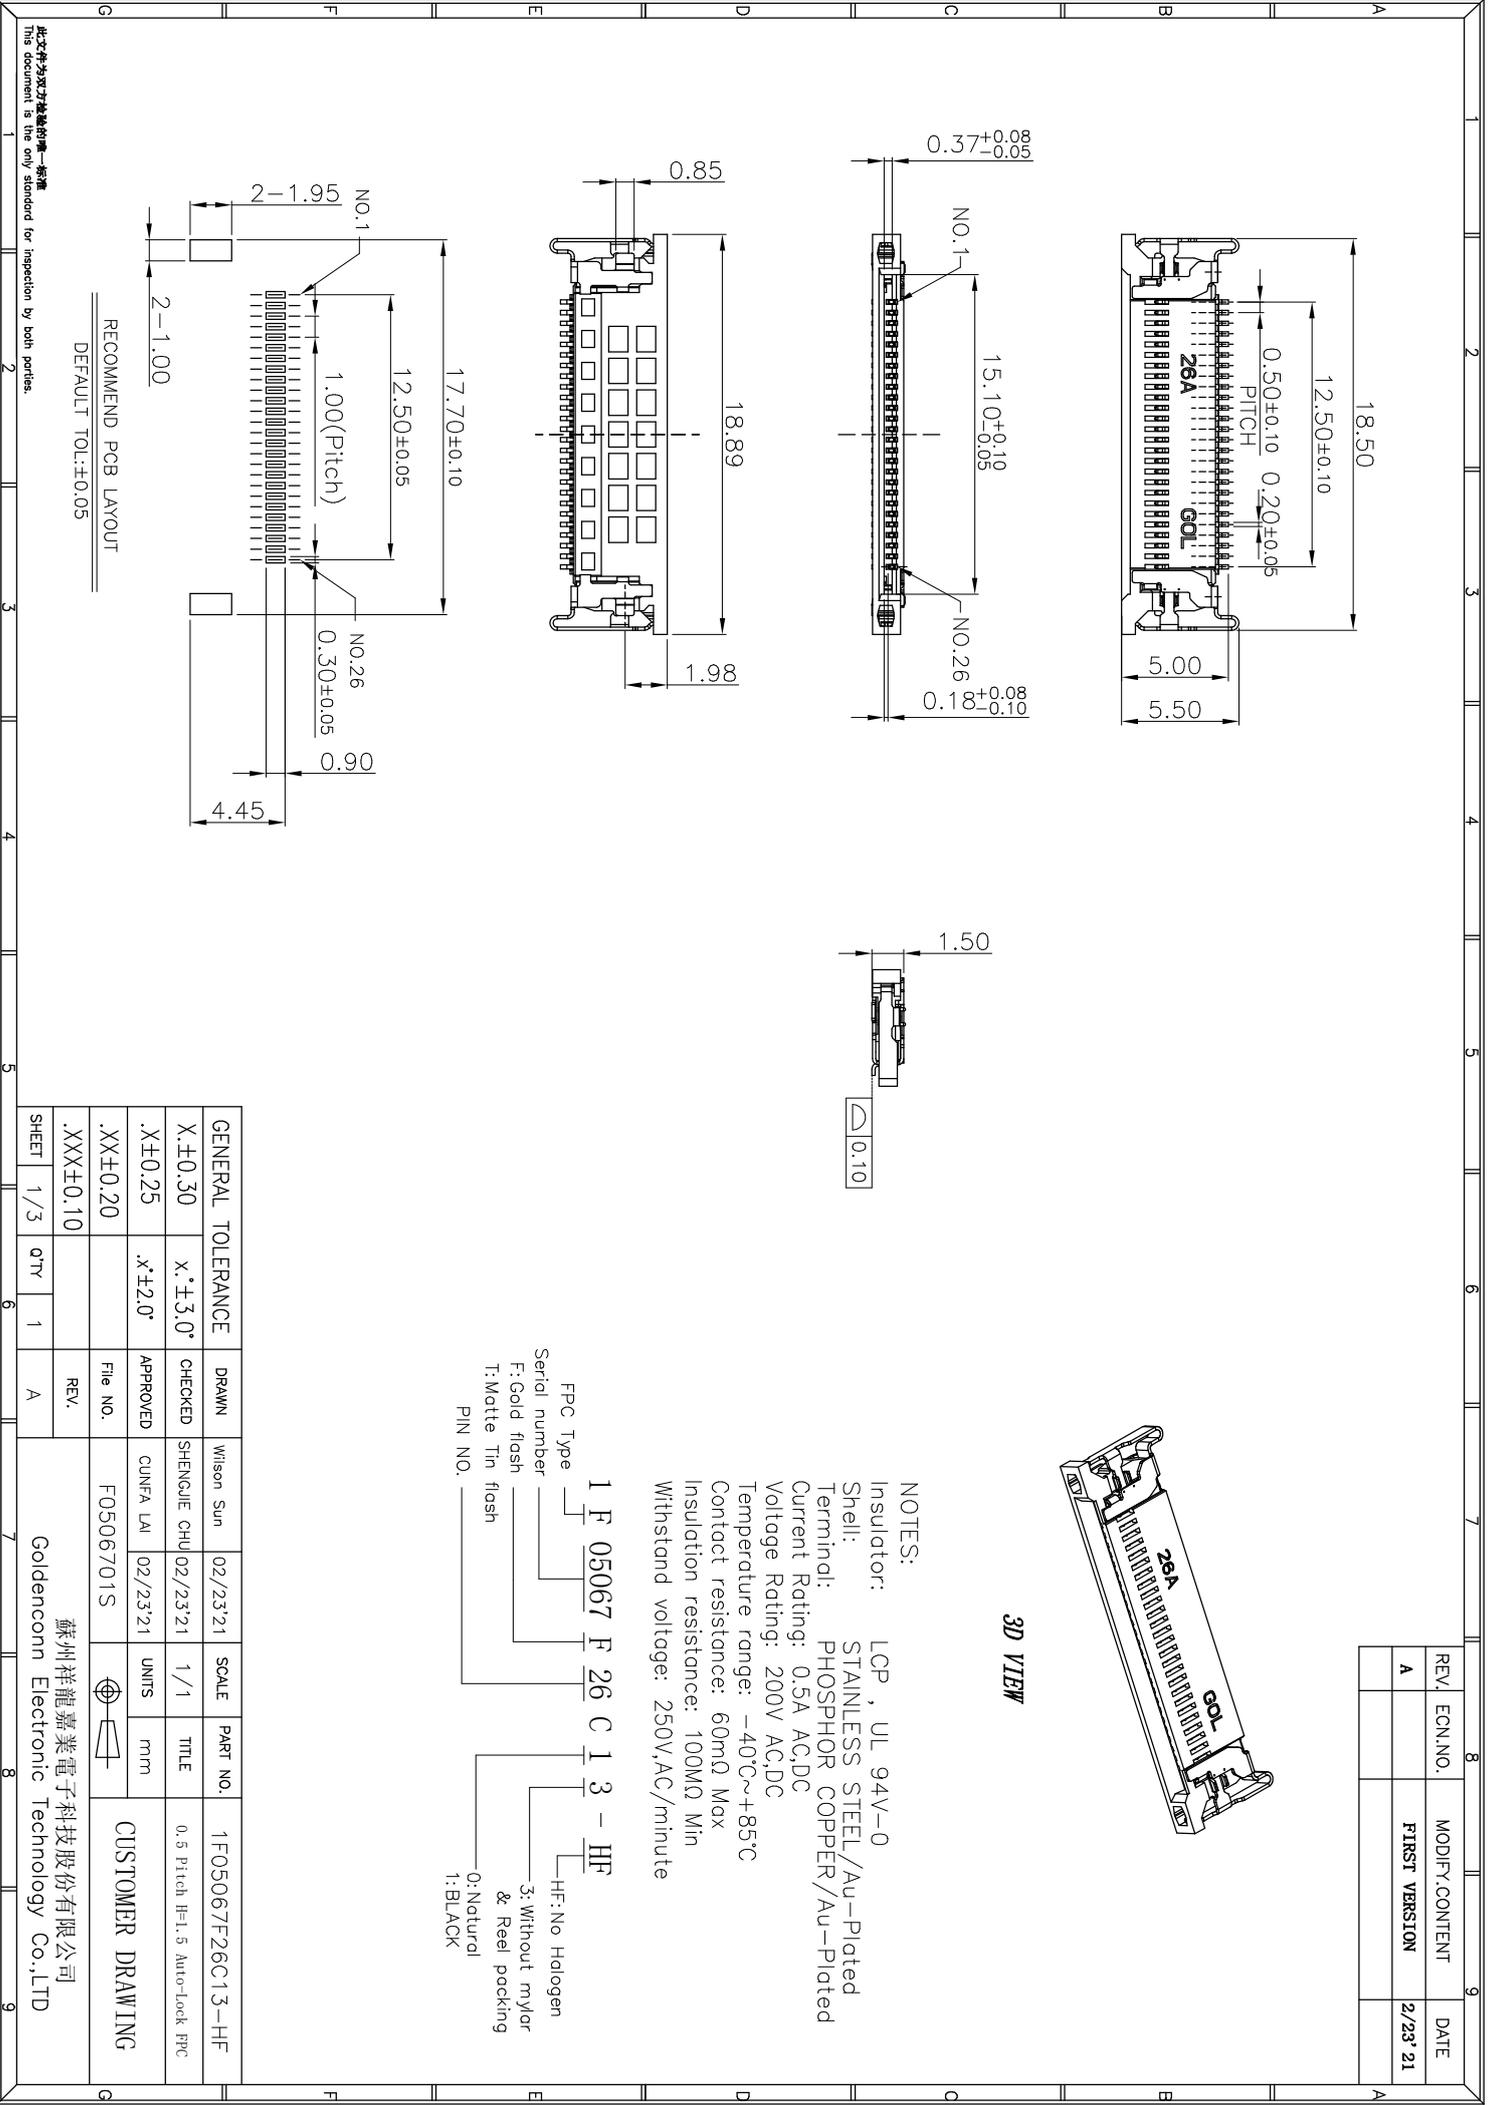

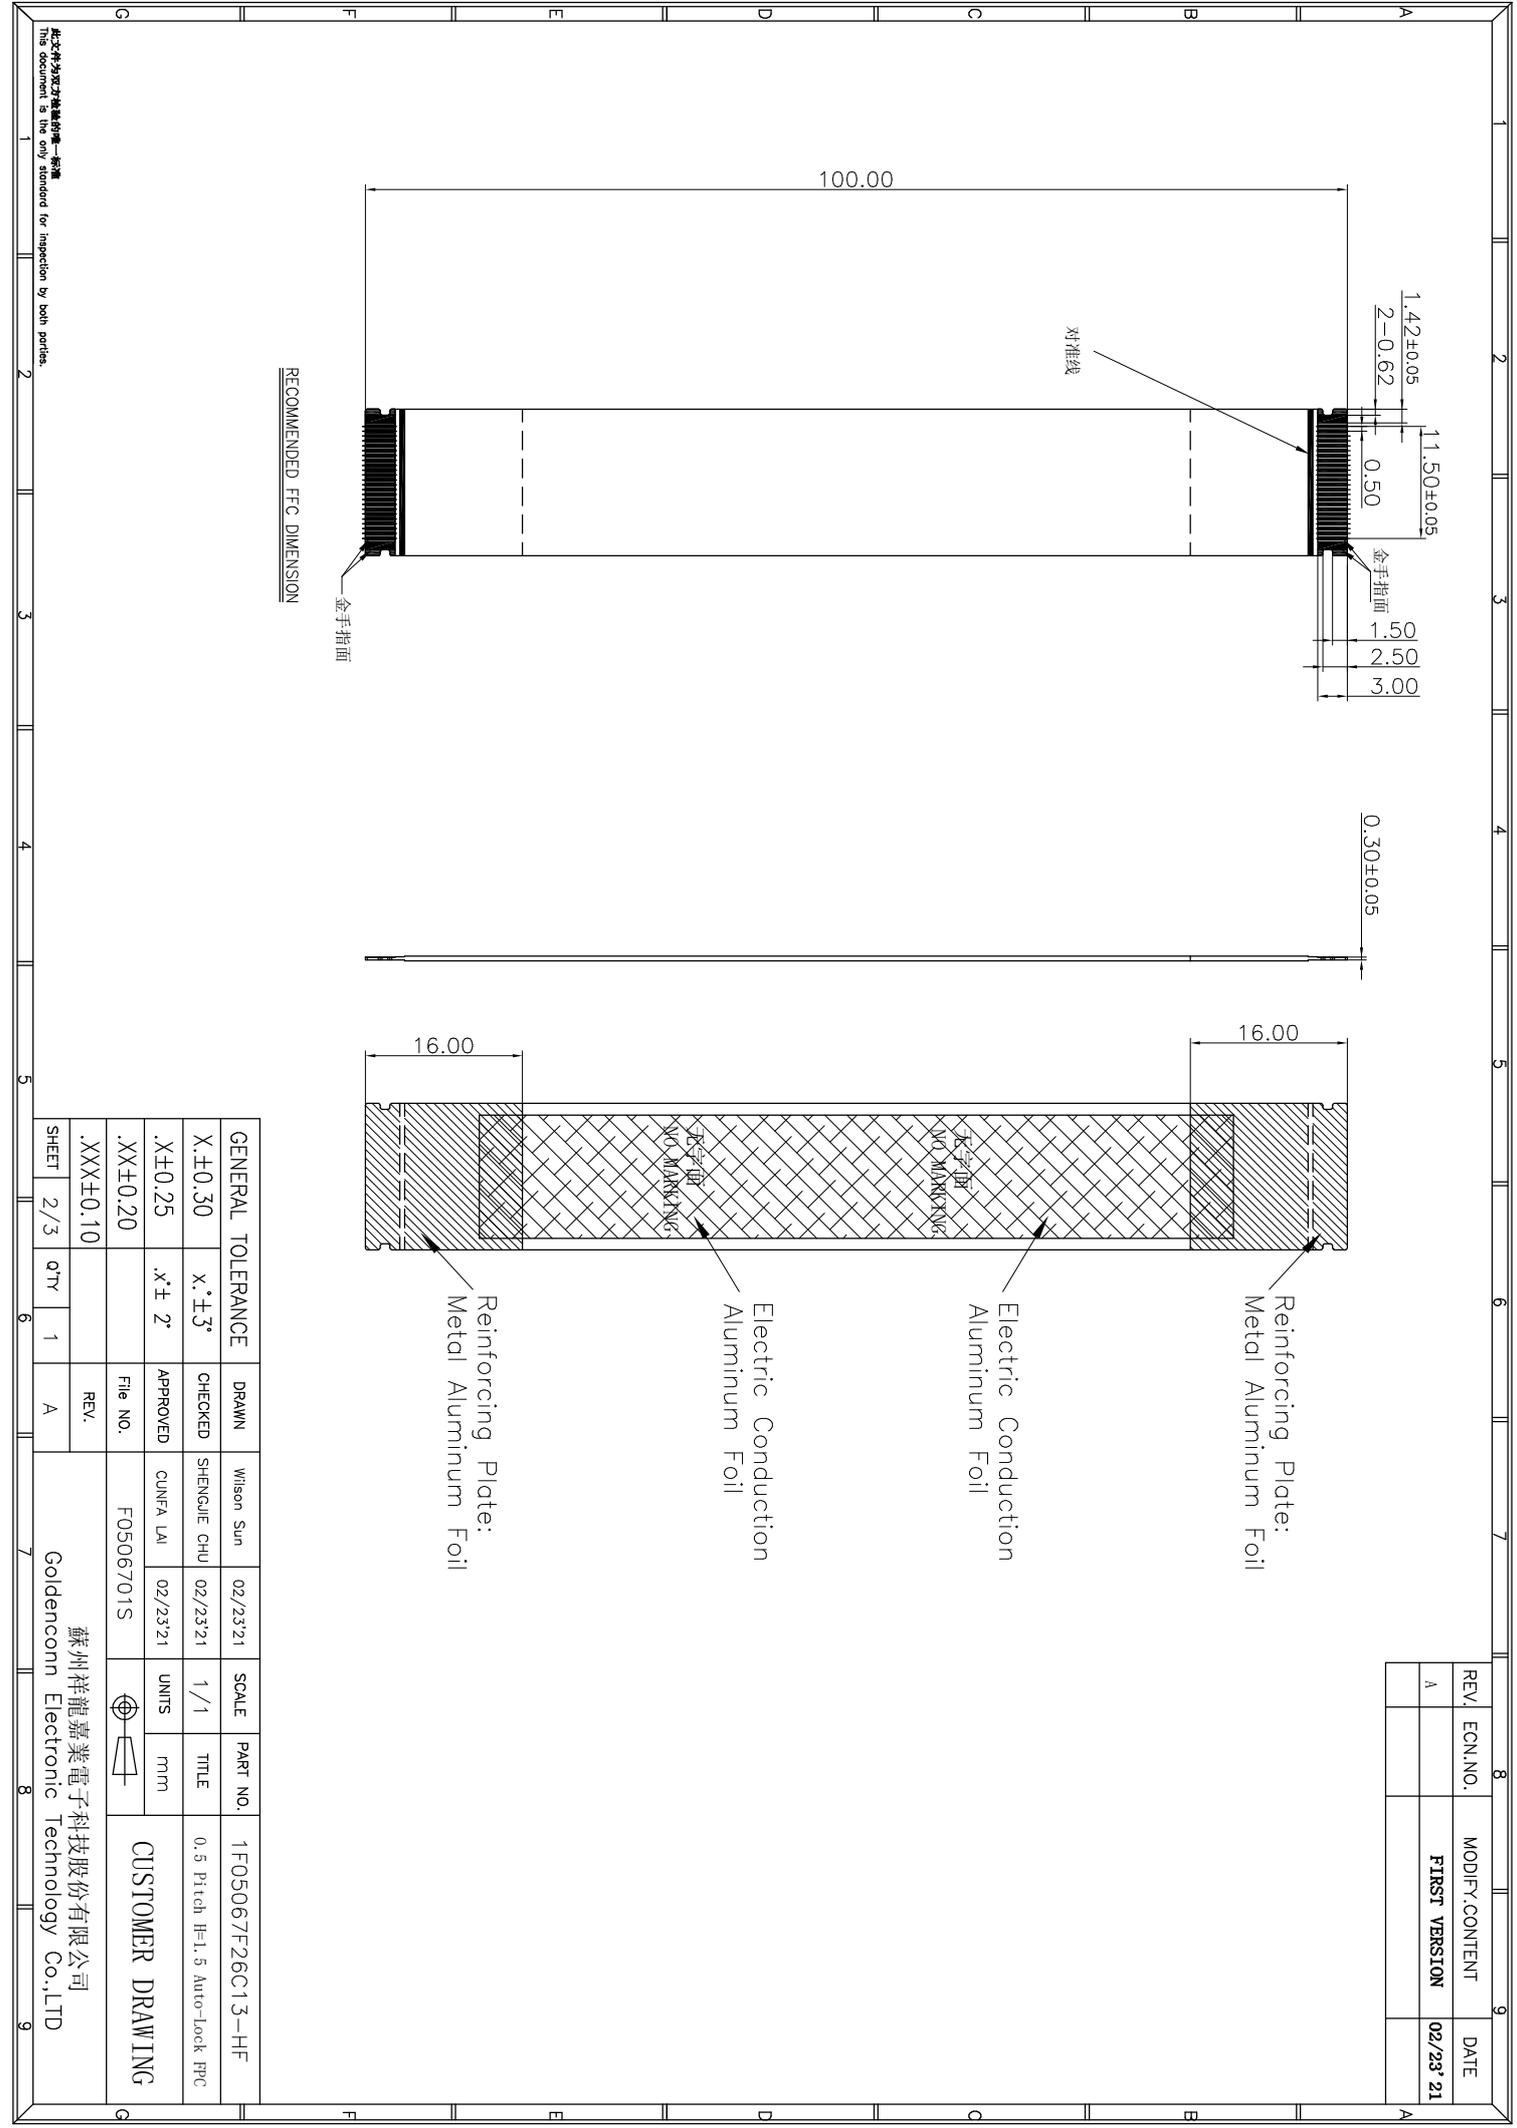

REV.	EQN. NO.	MODIFY. CONTENT	DATE
A		FIRST VERSION	02/23' 21

RECOMMENDED FPC DIMENSION

金手指面

对准线

0.30±0.05

Reinforcing Plate:
Metal Aluminum Foil

Electric Conduction
Aluminum Foil

Electric Conduction
Aluminum Foil


Reinforcing Plate:
Metal Aluminum Foil

GENERAL TOLERANCE		DRAWN	DATE	SCALE	PART NO.
X. ± 0.30	X. ± 3°	Wilson Sun	02/23'21	1/1	1F05067F26C13-HF
.X ± 0.25	.X ± 2°	SHENGJIE CHU	02/23'21	mm	0.5 Pitch H=1.5 Auto-Lock FPC
.XX ± 0.20		CUNFA LAI	02/23'21		
.XXX ± 0.10		File NO.	F0506701S		
SHEET 2/3	QTY 1	REV. A			

此文件为苏州祥龍嘉業電子科技股份有限公
This document is the only standard for inspection by both parties.

蘇州祥龍嘉業電子科技股份有限公司
Goldconn Electronic Technology Co., LTD

CUSTOMER DRAWING

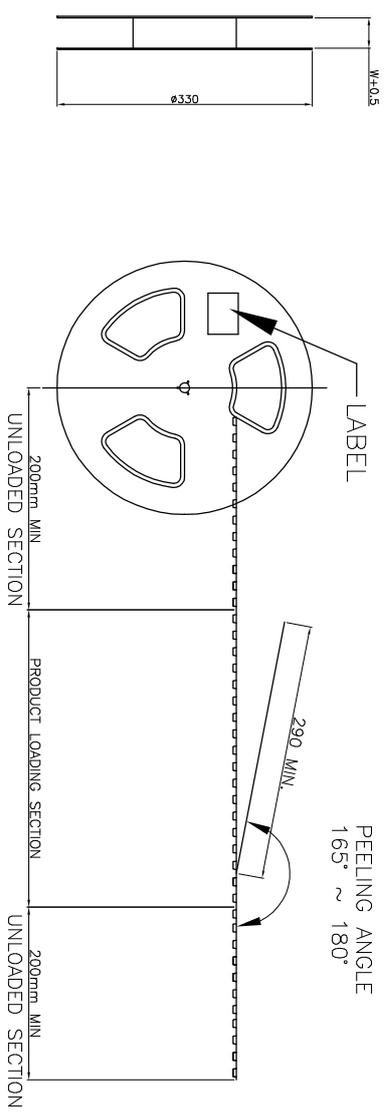

PEELING ANGLE
165° ~ 180°

- NOTES :
1. MATERIAL :
COVER TAPE : P.S T=0.05mm
CARRIER TAPE : P.S T=0.35mm
CARTON: CORRUGATED FIBER
 2. DIMENSION :
REEL : SEE DRAWING
SHIPPING BOX: 350X350X300mm
 3. QUANTITY : SEE TABLE
 4. PEELING RESISTANCE : 10gf~130gf
 5. PEELING SPEED : 300mm/MINUTES

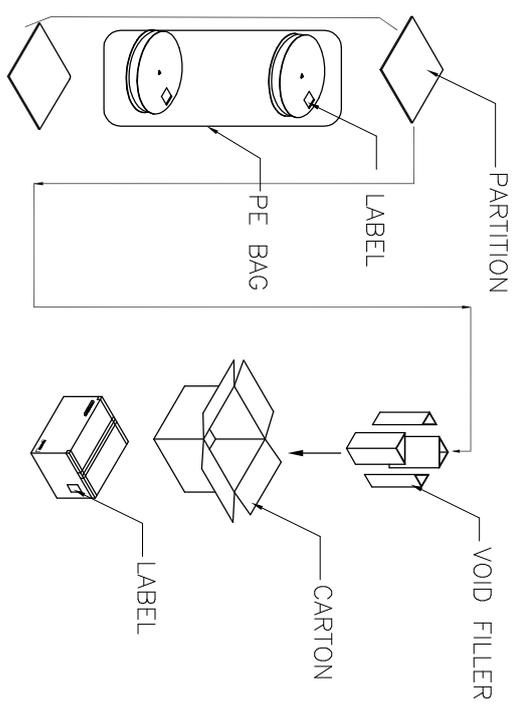
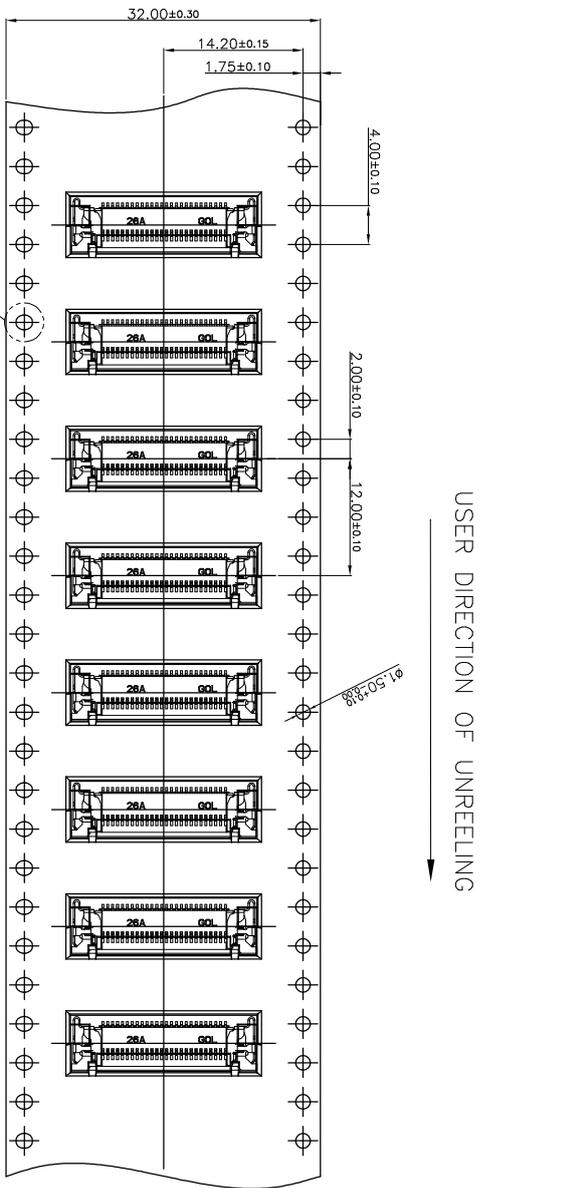


TABLE OF DIM.

POS	POS/REEL	BOX/REEL
26	2400	16800

GENERAL TOLERANCE		DRAWN	WILSON SUN	02/23/21	SCALE	PART NO.	1F05067F26C13-HF	
X.±0.30	X.±3°	CHECKED	SHENGJIE CHU	02/23/21	1/1	TITLE	0.5 Pitch H=L.5 Auto-Lock HPC	
.X±0.25	.X±2°	APPROVED	CUNFA LAI	02/23/21	UNITS	mm	CUSTOMER DRAWING	
.XX±0.20		File NO.	F0506701S					
.XXX±0.10		REV.						
SHEET	3/3	QTY	1	A				

此文件为苏州祥龍嘉業電子科技股份有限公
司之财产，未经许可，不得复制或传播。
This document is the only standard for inspection by both parties.

蘇州祥龍嘉業電子科技股份有限公司
Goldenconn Electronic Technology Co.,LTD